
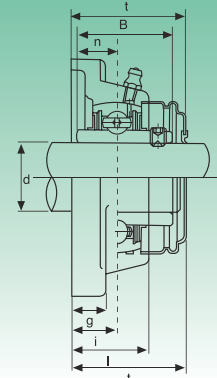



SUPPORTI A FLANGIA QUADRA - SQUARE BEARING UNITS

UCF2 Serie normale - Standard duty

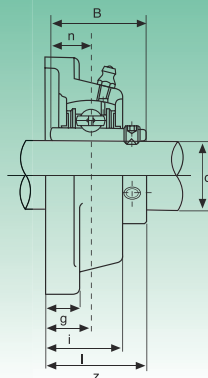

Tipo Type	Dimensioni - Dimensions											Bull. fiss. Bolt Size	Coefficienti di carico (N) Load ratings (N)		Cuscinetto Bearing	Supporto Housing	Peso Weight
	d	a	e	i	g	l	s	z	t	B	n		Dinamico C Dynamic C	Statico C ₀ Static C ₀			kg
	mm/inch												mm/inch				
UCF201	12	86	64	15	12	25,5	12	33,3	37,5	31	12,7	M10			UC201		0,60
UCF201-8	½	33/8	233/64	19/32	15/32	1	15/32	15/16	131/64	1,2205	0,500	3/8	12160	6318	UC201-8	F204	0,59
UCF202	15	86	64	15	12	25,5	12	33,3	37,5	31	12,7	M10			UC202		0,59
UCF202-9	9/16	33/8	233/64	19/32	15/32	1	15/32	15/16	131/64	1,2205	0,500	3/8	12160	6318	UC202-9	F204	0,59
UCF202-10	5/8														UC202-10		0,59
UCF203	17	86	64	15	12	25,5	12	33,3	37,5	31	12,7	M10			UC203		0,58
UCF203-11	11/16	33/8	233/64	19/32	15/32	1	15/32	15/16	131/64	1,2205	0,500	3/8	12160	6318	UC203-11	F204	0,57
UCF204	20	86	64	15	12	25,5	12	33,3	37,5	31	12,7	M10			UC204		0,56
UCF204-12	¾	33/8	233/64	19/32	15/32	1	15/32	15/16	131/64	1,2205	0,500	3/8	12160	6318	UC204-12	F204	0,56
UCF205	25	95	70	16	14	27	12	35,8	40	34,1	14,3	M10			UC205		0,80
UCF205-13	13/16														UC205-13		0,84
UCF205-14	7/8	3¾	2¾	5/8	35/64	11/16	15/32	113/32	19/16	1,3425	0,563	3/8	13300	7457	UC205-14	F205	0,83
UCF205-15	15/16														UC205-15		0,81
UCF205-16	1														UC205-16		0,80
UCF206	30	108	83	18	14	31	12	40,2	44,5	38,1	15,9	M10			UC206		1,12
UCF206-17	11/16														UC206-17		1,15
UCF206-18	11/8	4¼	317/64	45/64	35/64	17/32	15/32	119/32	1¾	1,5000	0,626	3/8	18525	10735	UC206-18	F206	1,14
UCF206-19	13/15														UC206-19		1,12
UCF206-20	1¼														UC206-20		1,11
UCF207	35	117	92	19	16	34	14	44,4	48,5	42,9	17,5	M12			UC207		1,46
UCF207-20	1¼														UC207-20		1,52
UCF207-21	15/16	439/64	35/8	¾	5/8	111/32	35/64	1¾	129/32	1,6890	0,689	7/16	24415	14630	UC207-21	F207	1,49
UCF207-22	13/8														UC207-22		1,46
UCF207-23	17/16														UC207-23		1,43
UCF208	40	130	102	21	16	36	16	51,2	55,5	49,2	19	M14			UC208		1,84
UCF208-24	1½	51/8	41/64	53/64	5/8	127/64	5/8	21/64	23/16	1,9370	0,748	½	27645	16910	UC208-24	F208	1,88
UCF208-25	19/16														UC208-25		1,85
UCF209	45	137	105	22	18	38	16	52,2	56,5	49,2	19	M14			UC209		2,15
UCF209-26	15/8														UC209-26		2,25
UCF209-27	111/16	513/32	49/64	55/64	23/32	1½	5/8	21/16	27/32	1,9370	0,748	½	32395	20235	UC209-27	F209	2,21
UCF209-28	1¾														UC209-28		2,17
UCF210	50	143	111	22	18	40	16	54,6	59,5	51,6	19	M14			UC210		2,42
UCF210-29	113/16														UC210-29		2,54
UCF210-30	17/8	55/8	43/8	55/64	23/32	19/16	5/8	25/32	211/32	2,0315	0,748	½	33345	22135	UC210-30	F210	2,49
UCF210-31	115/16														UC210-31		2,44
UCF210-32	2														UC210-32		2,40
UCF211	55	162	130	25	20	43	19	58,4	63	55,6	22,2	M16			UC211		3,31
UCF211-32	2														UC211-32		3,46
UCF211-33	21/16	63/8	51/8	63/64	25/32	111/16	¾	15/16	231/64	2,1890	0,874	5/8	41230	27930	UC211-33	F211	3,40
UCF211-34	21/8														UC211-34		3,35
UCF211-35	23/16														UC211-35		3,29
UCF212	60	175	143	29	20	48	19	68,7	73,5	65,1	25,4	M16			UC212		4,28
UCF212-36	2¼														UC212-36		4,41
UCF212-37	25/16	657/64	55/8	19/64	25/32	157/64	¾	245/64	257/64	2,5630	1,000	5/8	49780	34390	UC212-37	F212	4,33
UCF212-38	23/8														UC212-38		4,26
UCF212-39	27/16														UC212-39		4,19
UCF213	65	187	149	30	22	50	19	69,7	74,5	65,1	25,4	M16			UC213		4,99
UCF213-40	2½	723/64	555/64	13/16	55/64	131/32	¾	2¾	215/16	2,5630	1,000	5/8	54340	38095	UC213-40	F213	5,08
UCF213-41	29/16														UC213-41		4,99
UCF214	70	193	152	31	22	54	19	75,4	81,5	74,6	30,2	M16			UC214		5,85
UCF214-42	25/8														UC214-42		6,06
UCF214-43	211/16	719/32	563/64	17/32	55/64	21/8	¾	221/32	313/64	2,9370	1,189	5/8	59090	41895	UC214-43	F214	5,96
UCF214-44	2¾														UC214-44		5,86
UCF215	75	200	159	34	22	56	19	78,5	83,5	77,8	33,3	M16			UC215		6,91
UCF215-45	213/16														UC215-45		7,16
UCF215-46	27/8	77/8	617/64	111/32	55/64	27/32	¾	33/32	39/32	3,0630	1,311	5/8	64030	45885	UC215-46	F215	7,05
UCF215-47	215/16														UC215-47		6,94
UCF215-48	3														UC215-48		6,82
UCF216	80	208	165	34	22	58	23	83,3	88,5	82,6	33,3	M20			UC216		7,50
UCF216-49	31/16														UC216-49		7,68
UCF216-50	31/8	83/16	6½	111/32	55/64	29/32	29/32	39/32	339/64	3,2520	1,311	¾	69065	50350	UC216-50	F216	7,55
UCF216-51	33/16														UC216-51		7,42
UCF217	85	220	175	36	24	63	23	87,6	92,6	85,7	34,1	M20			UC217		9,66
UCF217-52	3¾														UC217-52		9,88
UCF217-53	35/6	821/33	657/64	127/64	15/16	215/32	29/32	37/16	341/64	3,3740	1,343	¾	79800	58805	UC217-53	F217	9,74
UCF217-55	37/16														UC217-55		9,45
UCF218	90	235	187	40	24	68	23	96,3	101,5	96	39,7	M20			UC218		12,06
UCF218-56	3½	9¼	723/64	137/64	15/16	211/16	29/32	325/32	4	3,7795	1,5630	¾	91295	67925	UC218-56	F218	12,17
UCF220	100	265	210	44	25	70	27	110	138	108	42	M12	122,1	93	UC220	F218	17,58
UCF220-64	101,6	265	210	44	25	70	27	110	138	108	42	M12			UC220-64		17,58

Disponibile in acciaio inox Supporto: AISI 304 - Cuscinetto: AISI 440C o 420C - Available stainless steel Housing: AISI 304 - Bearing: AISI 440C or 420C

Disponibile su richiesta con cuscinetto SA (SAF.) - Available under request with SA bearing (SAF.)